



STREAM TRANSMITTER SPECIFICATIONS	
ENVIRONMENTAL (OPERATING)	-30°C to 70°C (-22°F to 158°F), 0% to 95% R.H. (NON-CONDENSING)
INPUT POWER	24 VAC ± 10% Class 2, 50/60 Hz 19 VA MAX, 16 SENSORS (2.2 VA TRANSMITTER ONLY) 24 VDC (18 – 32 VDC) 550 mA MAX, 16 SENSORS (32 mA TRANSMITTER ONLY)
INPUTS	2 UNIVERSAL INPUTS BINARY (CONTACT CLOSURE or ACTIVE), VOLTAGE (0 – 10 VDC), RESISTIVE (0 – 50 kΩ)
OUTPUTS	4 ANALOG OUTPUTs (0 to 10 VDC, configurable; MAX: 10 mA)
COMMUNICATION	BACNET IP, BACNET MS/TP (9600, 19200, 38400, 76800 baud rates) BLUETOOTH
INDICATORS	STATUS LED BAR ANDROID/IOS/DESKTOP APP FOR DIAGNOSTICS & LCD DISPLAY (OPTIONAL)
HOUSING	UL 94 V-0, PC-ABS PLASTIC
CERTIFICATIONS & CONFORMANCE	BTL (B-ASC) CE Cert. to CSA E60730-1:2020 Conforms to UL Std. 60730-1:2021 FCC/IC

OPTIONS:

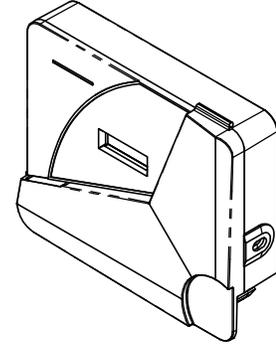


[WITH LCD DISPLAY]

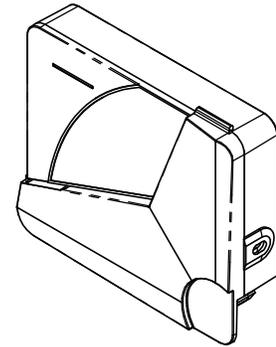

[NO DISPLAY]


DIMENSIONS: inches [mm]

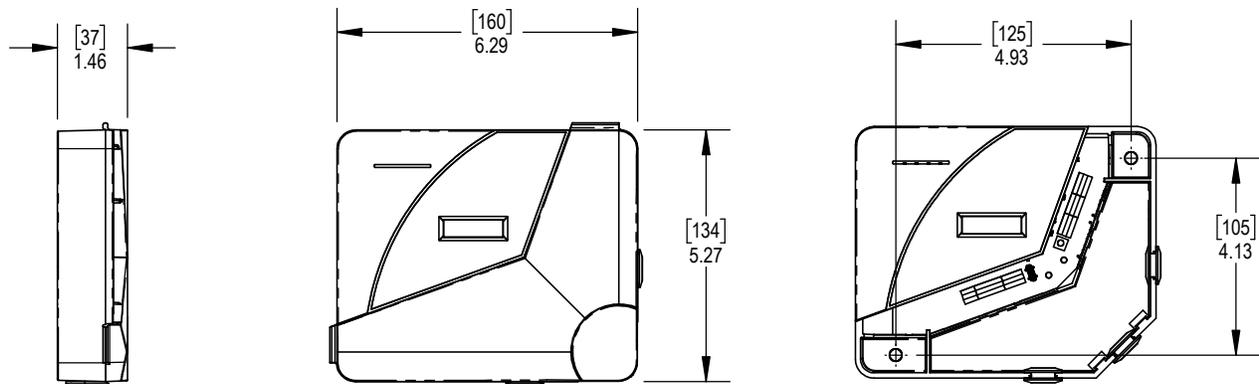

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

POWER	24V	INPUT POWER, 24V AC/DC
	NEUTRAL	INPUT POWER, NEUTRAL
PROBE	15V	PROBE POWER, 15VDC
	COM	PROBE POWER, COM
	TX/RX	PROBE COMMUNICATION
	ADDR	PROBE AUTO-ADDRESS
BACNET	COM	BACNET COM
	-	BACNET -
	+	BACNET +
INPUTS	UI1	UNIVERSAL INPUT 1
	COM	INPUT COM
	UI2	UNIVERSAL INPUT 2
OUTPUTS	AO1	ANALOG OUTPUT 1
	COM	OUTPUT COM
	AO2	ANALOG OUTPUT 2
	AO3	ANALOG OUTPUT 3
	COM	OUTPUT COM
	AO4	ANALOG OUTPUT 4

TERMINATION:

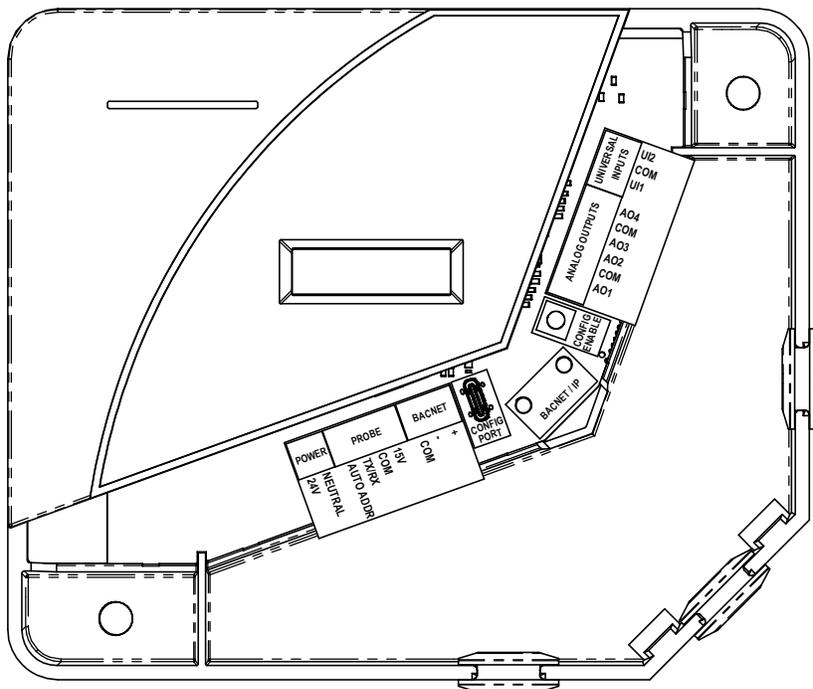


NOTE: SHOWN WITH LCD DISPLAY OPTION

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



VELOCITY/TEMPERATURE SENSOR SPECIFICATIONS

ENVIRONMENTAL	-40°C to 85°C (-40°F to 185°F), 0% to 100% R.H. ¹	
INPUT POWER	SUPPLIED BY TRANSMITTER	
SENSOR	TYPE	THERMAL DISPERSION
	THERMISTOR	GLASS ENCAPSULATED, HERMETICALLY SEALED.
	VELOCITY	0-5000 FPM, 2% OF READING
	TEMPERATURE	± 0.2°C (0.36°F), ACROSS OPERATING RANGE
	HOUSING	PP 10% GLASS

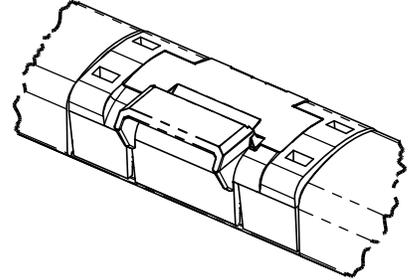

¹ Operating the sensor within condensing humidity will limit its ability to provide accurate measurements.


DIMENSIONS: inches [mm]

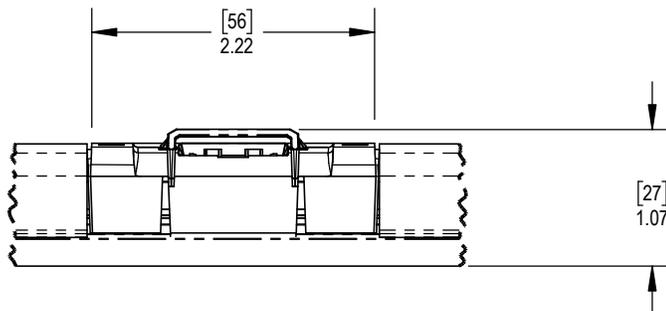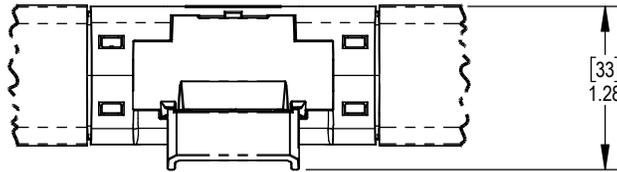


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

PROBE SPECIFICATIONS

ENVIRONMENTAL (OPERATING)	-40°C to 85°C (-40°F to 185°F), 0% to 100% R.H.
PROBE BODY	ANODIZED (TYPE II) 6063-T6 ALUMINUM
PROBE END CAP	PP 10% GLASS
PROBE COVER	PP 10% GLASS
CABLE GLANDS	UL94 V-2 NYLON 6
PROBE GASKET	NBR PVC, CLOSED-CELL
MOUNTING HARDWARE (INCLUDED)	18-8SS NYLOCK LOCKNUT, 1/4IN-20
	18-8SS NEOPRENE SEALING WASHER
	18-8SS #8 SHEET METAL SCREWS
CERTIFICATIONS & CONFORMANCE	Conforms to UL Std. 2043

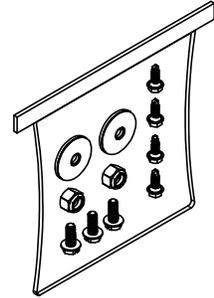

DIMENSIONS: inches [mm]

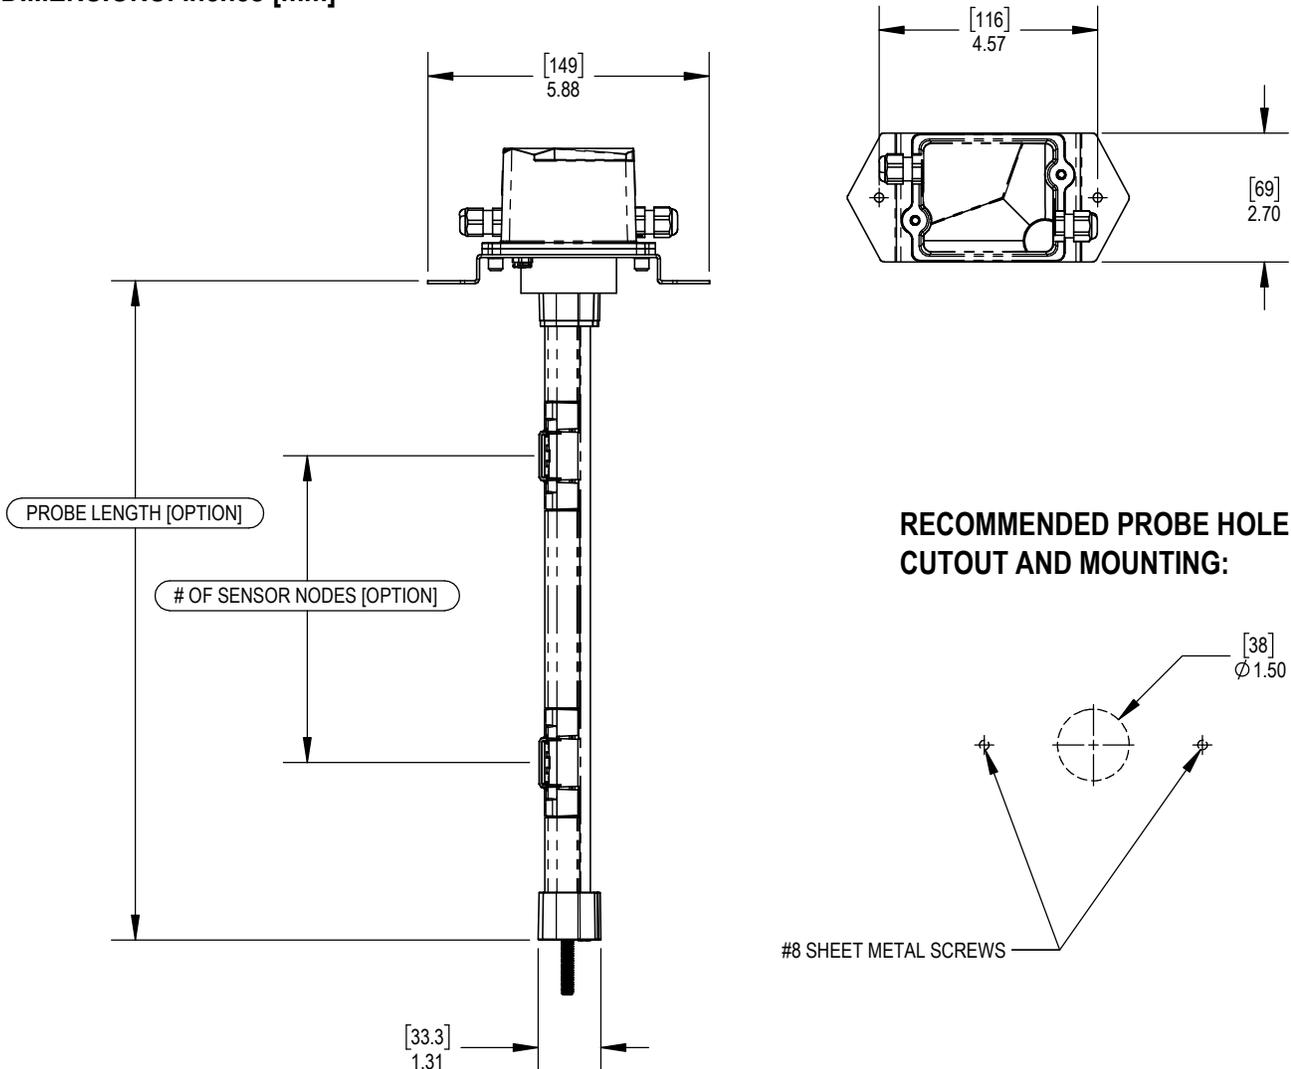

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



STREAM-1-1 - - - - -

Model Name

STREAM-1-1

Transmitter

DNW = With LCD display, wireless turned off
DBT = With LCD display, with Bluetooth
NW = No display, wireless turned off
BT = No display, with Bluetooth

Probe Housing & Finish

AA = Anodized aluminum

Probe Length [Inside Duct Probe Length*]

*Note: This length should be selected as the inner duct dimension that the probe will be installed into.

8 = 8" probe length
- Up to -
120 = 120" probe length

Duct Mounting Configuration

ES = External rectangular or square duct

of Probes

1 = One probe
- up to -
4 = Four probes

of Velocity Sensors per Probe

1 = One sensor per probe

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



BACNET POINTS LIST					
Object	Name	Units	Range	Description	Write Setting
ANALOG INPUTS					
AI1	[Transmitter name] AI1 – [AI1 Device name]	Dynamic	Dynamic	Analog input with multiple uses See the <i>Installation, Operation, and Maintenance Manual</i> for options	R
AI2	[Transmitter name] AI2 – [AI2 Device name]	Dynamic	Dynamic	Analog input with multiple uses See the <i>Installation, Operation, and Maintenance Manual</i> for options	R
ANALOG OUTPUTS					
AO1	[Transmitter name] AO1 – [AO1 Device name]	Dynamic	Dynamic	Analog output with multiple uses See the <i>Installation, Operation, and Maintenance Manual</i> for options	R/W
AO2	[Transmitter name] AO2 – [AO2 Device name]	Dynamic	Dynamic	Analog output with multiple uses See the <i>Installation, Operation, and Maintenance Manual</i> for options	R/W
AO3	[Transmitter name] AO3 – [AO3 Device name]	Dynamic	Dynamic	Analog output with multiple uses See the <i>Installation, Operation, and Maintenance Manual</i> for options	R/W
AO4	[Transmitter name] AO4 – [AO4 Device name]	Dynamic	Dynamic	Analog output with multiple uses See the <i>Installation, Operation, and Maintenance Manual</i> for options	R/W
ANALOG VALUES					
AV01	[Transmitter name] Average flow velocity	Fpm; m/s	0 – 5000 fpm 0 – 25 m/s	Average flow rate	R
AV02	[Transmitter name] Average flow volume	CFM; l/s	0 – 500000 CFM 0 – 240000 L/s	Average volumetric flow rate	R
AV03	[Transmitter name] Average duct temperature	°F; °C	-40°F to 185°F -40°C to 85°C	Average duct temperature	R
<i>Note : Analog value for AVx0yz, will display as: x = probe number, y = sensor node position</i>					
AVx0y1	[Transmitter name] Velocity – [Sensor name]	Fpm; m/s	0 – 5000 fpm 0 – 25 m/s	Sensor velocity reading	R
AVx0y2	[Transmitter name] Temperature – [Sensor name]	°F; °C	-40°F to 185°F -40°C to 85°C	Sensor temperature reading	R

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



DEFAULT CHANGE OF VALUE (COV) INCREMENTS				
VARIABLE	DEFAULT COV INCREMENT	UNIT S	DEFAULT COV INCREMENT	UNIT S
-	IMPERIAL		METRIC	
Velocity	10	fpm	0.05	m/s
Airflow	100	CFM	50	L/s
Temperature	1	°F	1	°C

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.